


# DIRAVIAM IMPORT AND EXPORT

243, Bombay castle, Ooty, The Nilgiris, Tamilnadu, India

Cell: +91 8098915712, +91 9789227830

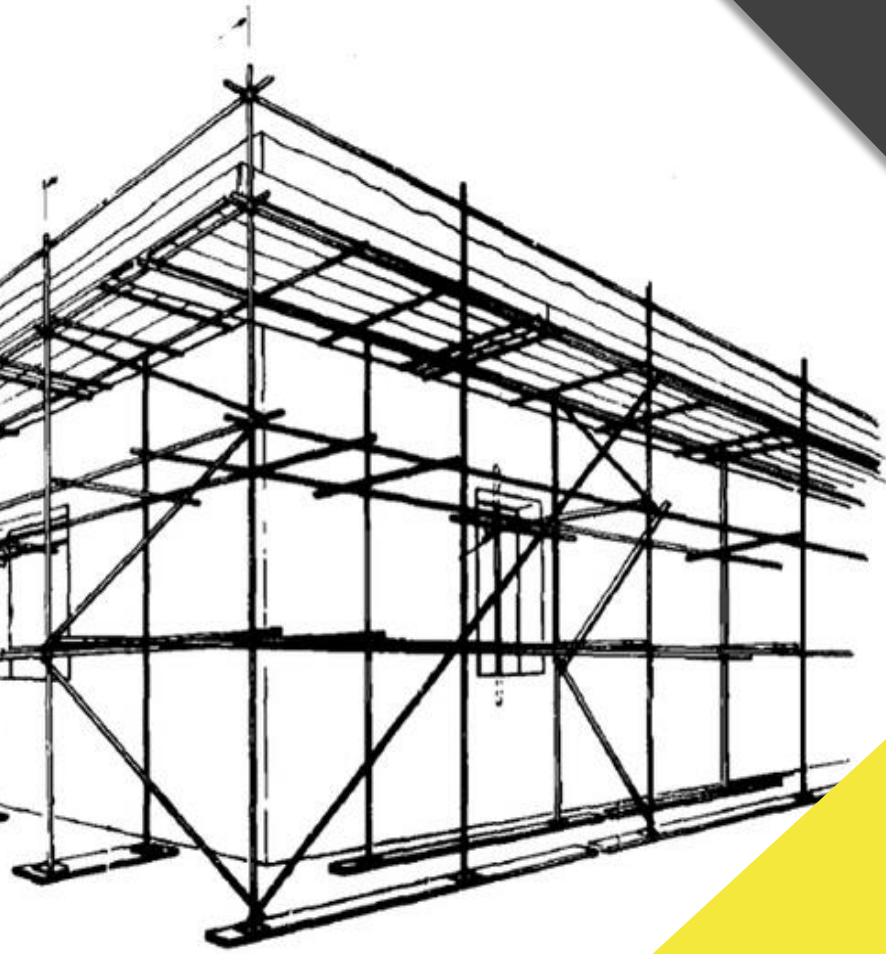


**Formwork Accessories  
& Fittings**



<b>Item</b>	<b>Waller plate</b>
Size	110 mm to 120 mm square shape/ As required
Finish	Galvanized silver/gold
Packing	Standard 25pcs /50 pcs bag/ As required
Load capacity	For wood chording - surface pressure 20 - 50 K.N Load bearing capacity 90 - 135 K.N
Material	Low carbon mild steel



<b>Item</b>	<b>Tie rod</b>
Size	Standard 6 metre / As required Thickness - 15/17 mm and 18/20 mm
Finish	Self-finish / galvanize / gold
Packing	Standard 5 pcs bundle / As required
Load capacity	90 – 145 K.N
Material	Low carbon mild steel / EN-8D / As required




<b>Item</b>	<b>Anchor nut</b>
Size	80 mm to 150 mm dia with 2 & 3 wing. Suitable threading - 15/17 mm and 18/20 mm. 350 grams – 1800 grams / As required
Finish	Galvanized Gold/Silver
Packing	Standard 50 pcs/100 pcs bundle / As required
Load capacity	110-145 K.N
Material	Malleable casting BS 32-12 / SG Iron casting
Thread	French / English



<b>Item</b>	<b>Wing nut</b>
Size	Standard / As required Suitable threading- standard 15/17 mm & 19/20 mm. 170 grams – 600 grams / As required
Finish	Galvanized Gold/Silver/Hot dip galvanized
Packing	Standard 50 pcs/100 pcs bundle / As required
Load capacity	110 to 135 K.N
Material	Malleable/ SG Iron casting BS 32-12
Thread	French / English



<b>Item</b>	<b>Water stopper / Water barrier</b>
Size	Standard / As required Suitable threading- 15/17 mm and 18/20 mm 360 – 740 grams / As required
Finish	Galvanized silver/self-machined
Packing	50 pcs bag / As required
Load capacity	110-145 K.N
Material	Malleable casting BS 32-12/ SG Iron casting
Accessories	2 plastic PVC cap (virgin quality)

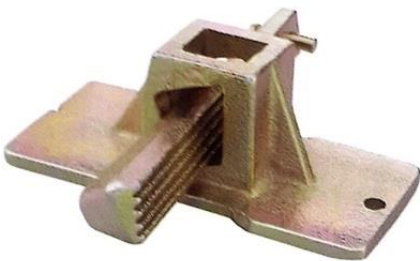

<b>Item</b>	<b>Rapid clamps</b>
Weight	275 to 650 g / As required
Finish	Electroplated
Packing	50 or 100 pcs / As required
Body Material	Malleable casting
Wedge material	Drop forged
Application	Use on 8mm to 100mm steel bars





**Item**

**Shuttering clamp/ Concrete clamp**

Size

Bellow / As required.  
 Thickness – 3.5 mm to 8mm / As required  
 Long – 60 cm to 180 cm.  
 Hook – 16 to 20 mm Square / Round / Deformed  
 L bend – 90 degree

Finish

Self / Black paint

Packing

Standard 10 to 15 pcs bundle / As required

Load capacity

90 to 125 K.N

Material

Low carbon mild steel



**Item**

**Jack nut**

Size

Standard / As required.  
 Suitable threading – 32 to 40 OD / As required  
 350g to 800g / As required

Finish

Galvanized silver / Self

Packing

Standard 50 pcs - 100 pcs bundle / As required

Load capacity

110 to 135 K.N

Material

Malleable casting BS 32 -12/ SG Iron casting



**Cuplock Accessories**



**Hex Nut (Tie Rod Connectors)**



**Forged Coupler**



**Board retaining couplers**



**Putlog coupler**



**Sleeve coupler**



**Joint pin**



**Universal Jack**




**Base and U jack**



**Pipe sleeve with nut**



**Adjustable prop**



**sheet metal coupler swivel**



**Sheet metal coupler fixed**



**Forged coupler swivel**